


PRODUCT




Dimensions

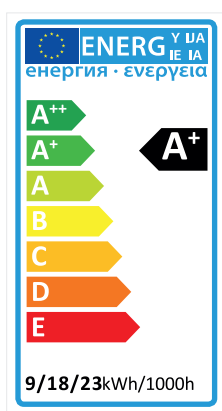

TUBE

Luminance Diagrams

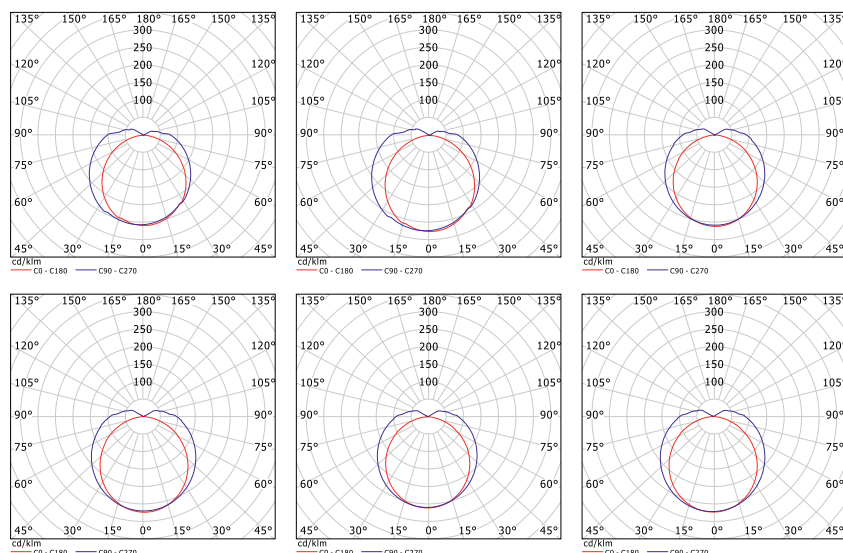

Product

EN The combination of aluminum and polycarbonate on the cover and its swivel cap for modulating its beam angle make it your ideal partner.

ES La combinación de una cubierta de aluminio y policarbonato y su casquillo giratorio para modular su ángulo apertura le convierte en su aliado ideal.

Specifications

Item No.	Power Consumption	Voltage	Color Temperature	Color	Luminous Flux	Angle	Base Type	Dimmable	DRV	CRI	IP
T807800954001	9W	AC100-240V	4000K	NW	750LM	120°	G13	No	-	80	20
T807800956001	9W	AC100-240V	6500K	CW	800LM	120°	G13	No	-	80	20
T807801854001	18W	AC100-240V	4000K	NW	1500LM	120°	G13	No	-	80	20
T807801856001	18W	AC100-240V	6500K	CW	1600LM	120°	G13	No	-	80	20
T807802354001	23W	AC100-240V	4000K	NW	1850LM	120°	G13	No	-	80	20
T807802356001	23W	AC100-240V	6500K	CW	2000LM	120°	G13	No	-	80	20

Keymate®