

AdPost Screen Series

Create a more Valuable Urban Advertising Media

Keymate®




Let shop window brighter and more clear, Let customers experience the scenery outside window, and make each store capture every selling point.



Key Features


Standardization

Standard display, fixed size and display size.



Simple

Simple control, plug and play, simple and deft style, fulfill high effective work.



Freestyle

Randomly applied to each indoor scene, flexible and varied, a trully moving advertising medium.



Process design


Arc line and metal texture, bonding craft and design beauty.



Keymate®

AdPost Screen Series

Create a more Valuable Urban Advertising Media



Screen Size


700x 1000


Application Scenarios


Glass wall


AdPost Screen Series

- Transparency: 82%
- Brightness: 5000cd/m²
- Depth: 37mm
- Viewing Angle: 160°

 Super transparent

 Smart


 Simple

 Energy saving

Other Features

Super(or ultra) transparent

More than 82% transparency, the highest transparency in led screen industry.



High contrast ratio

High contrast ratio 1500:1, stunning color, dynamic image and eye-catching.




Smart

Smart control by mobile APP, wireless data transmission, screen+data cloud+APP WIFI connection.




Wider advertising Scope

160° viewing angle, eye-catching and wide scope.



Energy saving

300W power consumption per square meter.




High refresh rate

High refresh rate, in the industry, the minimum pixel pitch (able to mass production) 3mm, 3840HZ refresh rate.




Dimensions (unit : mm)

730 X 1171 X 37 /
23.5Kg/pcs

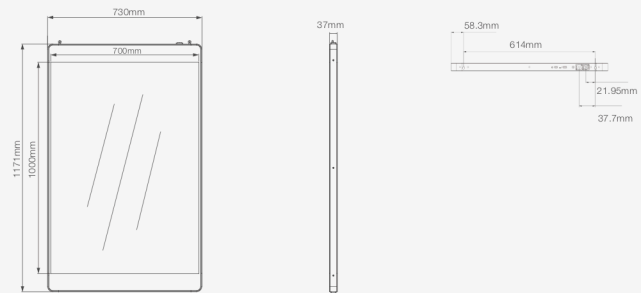

Connectivity

- 1 POWER
- 2 LAN
- 3 WIFI
- 4 USB
- 5 CLOUDS
- 6 HEADSET
- 7 RESET
- 8 HDMI

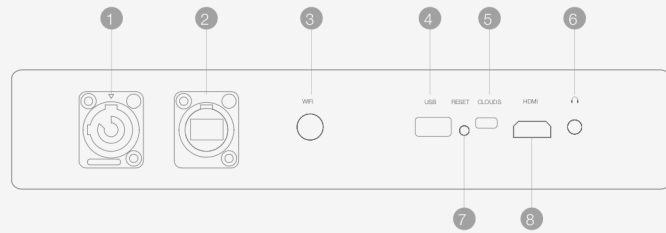

Specifications

Size (mm) 700 X 1000

Model	P3	
	- A	- B
Pixel Pitch (mm)	3.9 x 7.8	
Pixel Density (dot/ m²)	32768	
The overall size(mm)	730 X 1171 X 37	
Module Resolution (dot)	178 X 128	
LED Type	SMD 3 in 1	
Brightness (cd/ m²)	5000	
Transparency	82%	
Viewing Angle	160°	
Grey Level	16384	
Scan Mode	1/4	
Refresh Rate (Hz)	3840	
Frame Frequency (Hz)	60	
Avg.Power Consumption	300	
Max.Power Consumption	1000	
Maintenance	Back	
IP	IP45	
Working Temp	- 20~50°C	
Weight (kg/ pc)	23.5	

System topology

